
Tank Equipment

Sampling valve

PEMS III

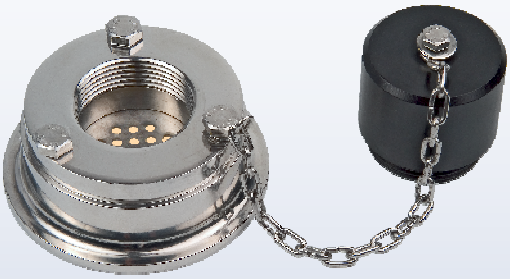

- Sample taking with seringue
- Hygienic design reinforced with flush body
- Uncomplicated maintenance
- 1 hole / sample to avoid cross-contamination

Gillain & Co
HYGIENIC EQUIPMENT FOR FOOD & LIFE SCIENCES
Gillain & Co NV | Boomsesteenweg 85, B-2630 Aartselaar | Tel. +32 3 870 60 80, Fax +32 3 870 60 89 | advice@gillain.com | www.gillain.com

APPLICATION :

The PEMS V sampling valve is used to take a liquid sample from a tank for quality and/or bacteriology controls.
Its hygienic "flush membrane" hygienic design (flared body) guarantees the absence of retention zones (favourable to bacterial growth) with clear and/or relatively non-viscous liquids, as well as excellent cleanability.
The sample is taken with a syringe, thru an auto-cicatrizing membrane

TECHNICAL DATA:

Materials:

Parts in contact with product: 1.4404 stainless steel (316L)
Membrane: natural rubber

Characteristics:

In the standard version, working pressure must not exceed 6 bars, and temperature 80°C.
The elastomers are US FDA compliant.

OPTIONS:

- Membrane adapted to working conditions (Butyl)
- Other grades of material on demand

COMMISSIONING AND MAINTENANCE:

For all information concerning installation, commissioning, use and maintenance of this equipment, refer to technical notice XXX x F.